

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 64-002375

(43)Date of publication of application : 06.01.1989

(51)Int.Cl.

H01L 31/08
G01J 1/02

(21)Application number : 62-156583

(71)Applicant : NIKON CORP

(22)Date of filing : 25.06.1987


(72)Inventor : UDAGAWA KENJI

(54) INFRARED DETECTOR

(57)Abstract:

PURPOSE: To form a single crystal layer capable of forming an infrared detecting element having high quality onto an Si substrate, to which a signal processing circuit element is shaped, by forming a buffer layer onto the element forming Si substrate to which the signal processing circuit element is shaped.

CONSTITUTION: In an element forming Si substrate 10, an input diode 16 and a buried type CCD 18 are formed into an element isolation region on the main surface of a P-type Si substrate 12. A transfer gate electrode 22 is shaped onto a clearance section between the diode 16 and the CCD 18, and a CCD transfer electrode 26 is formed onto the CCD 18. A crystal layer 28 consisting of CaF₂ and BaP₂ is grown and shaped to such a substrate 10 so that the composition ratio of BaF₂ is increased gradually. A single crystal film 30 as a CdZnTe layer 30 is formed onto the layer 28. An infrared detecting element composed of a P-type HgCdTe layer 32 and an N-type HgZnTe layer 34 is shaped onto the layer 30. Accordingly, the infrared detecting element can be formed onto a signal processing circuit element made up of Si.

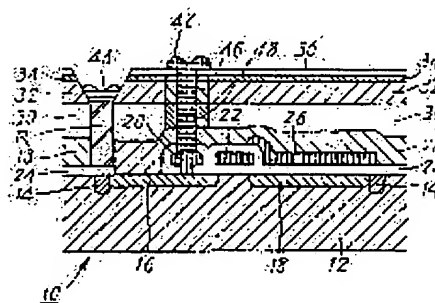

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of

rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right].

* EP00000000

PN - JP64002375 A 19890106
 PD - 1989-01-06
 PR - JP19870156583 19870625
 OPD - 1987-06-25
 TI - INFRARED DETECTOR
 IN - UDAGAWA KENJI
 PA - NIPPON KOGAKU KK
 IC - G01J1/02 ; H01L31/08

* WPI / DERWENT

TI - Infrared detector used for longer wavelength - has buffer layer between silicon substrate and monocrystal layer of mercury cadmium telluride NoAbstract Dwg 0/4
 PR - JP19870156583 19870625
 PN - JP64002375 A 19890106 DW198907 004pp
 PA - (NIKR) NIPPON KOGAKU KK
 IC - G01J1/02 ;H01L31/08
 OPD - 1987-06-25
 AN - 1989-051612 [07]

* PAJ / JPO

PN - JP64002375 A 19890106
 PD - 1989-01-06
 AP - JP19870156583 19870625
 IN - UDAGAWA KENJI
 PA - NIKON CORP
 TI - INFRARED DETECTOR

AB - PURPOSE:To form a single crystal layer capable of forming an infrared detecting element having high quality onto an Si substrate, to which a signal processing circuit element is shaped, by forming a buffer layer onto the element forming Si substrate to which the signal processing circuit element is shaped.
 - CONSTITUTION:In an element forming Si substrate 10, an input diode 16 and a buried type CCD 18 are formed into an element isolation region on the main surface of a P-type Si substrate 12. A transfer gate electrode 22 is shaped onto a clearance section between the diode 16 and the CCD 18, and a CCD transfer electrode 26 is formed onto the CCD 18. A crystal layer 28 consisting of CaF₂ and BaP₂ is grown and shaped to such a substrate 10 so that the composition ratio of BaF₂ is increased gradually. A single crystal film 30 as a CdZnTe layer 30 is formed onto the layer 28. An infrared detecting element composed of a P-type HgCdTe layer 32 and an N-type HgZnTe layer 34 is shaped onto the layer 30. Accordingly, the infrared detecting element can be formed onto a signal processing circuit element made up of Si.
 I - H01L31/08 ;G01J1/02